

WOLTMANN PULSE EMITTER WATER METER

Data Sheet

FEATURES

- Dry dial
- Threaded Woltmann (2") type for cold and hot water
- Flange sizes range: from 2" to 8"
- Woltmann water meter for horizontal and vertical assembly
- Working temperature: cold water up to 60° C
CWCA mod. up to 130 °C @ 16 bar
- Epoxy coated cast iron housing (except for CWF1 with brass housing)
- Max voltage 250 VAC, 200 VDC
- Max current 1.0 A
- Max power 10 VA
- Insulation voltage 4000 Vac
- Available water meter without pulse emitter



Configuration Info

MODELS	
CWFA	"CWFA" - Woltmann pulse sender water meter (cold water, dry dial)
CWCA	"CWCA" - Woltmann pulse sender water meter (hot water, dry dial)
CWF1	"CWF1" - Woltmann pulse sender water meter (cold water, dry dial, threaded 2")
CWFAT	"CWFAT" - Woltmann pulse sender water meter (cold water, dry dial, teflon coated)

Model **CWCA.** **015** **0** **01** **L** **0** **2.5**

GAUGES		
	inc	mm
050	2	50
065	2 1/2	65
080	3	80
100	4	100
150	6	150
200	8	200
250	10	250
300	12	300

CONNECTORS	
0	BNC
1	2 wires
3	2 wires (coaxial cable)

QUANTITY PER PULSES	
L	1 litre
D	10 litres
C	100 litres
M	1000 litres

PULSES PER LITRE

refer to the tables "Pulses per litre"



IMPIANTI DI DOSAGGIO
TRATTAMENTO ACQUE
AUTOMAZIONE
POMPE DOSATRICI PER PRODOTTI CHIMICI
FERTIRRIGAZIONE

WOLTMANN PULSE EMITTER WATER METER

Data Sheet

PULSES PER LITRE

PULSES PER LITER FOR CWFA / CWF1 SERIES								
	Water meter caliber							
	50 - 2"	65 - 2,5"	80 - 3"	100 - 4"	150 - 6"	200 - 8"	250 - 10"	300 - 12"
Pulses for 10 lt	1-2-4	1-2-4	1-2-4	n/a	n/a	n/a	n/a	n/a
Pulses for 100 lt	1-2-4	1-2-4	1-2-4	1-2-4	1-2-4	n/a	n/a	n/a
Pulses for 1000 lt	1-2-4	1-2-4	1-2-4	1-2-4	1-2-4	1-2-4	1-2-4	1-2-4
Pulses for 10000 lt	n/a	n/a	n/a	1-2-4	1-2-4	1-2-4	1-2-4	1-2-4

PULSES PER LITER FOR CWFA						
	Water meter caliber					
	50 - 2"	65 - 2,5"	80 - 3"	100 - 4"	150 - 6"	200 - 8"
Pulses for 100 lt	1			n/a		
Pulses for 1000 lt	n/a			1		

DIMENSIONS



GAUGES	(mm)	50	65	80	100	150	200	250	300	CWFI 50
	(inch)	2	2 1/2	3	4	6	8	10	12	CWFI 2
L - Length (mm)		200	200	230	250	300	350	450	500	200
B - Width (mm)		165	185	200	200	283	340	406	460	-
H - Height (mm)		214	228	234	250	310	338	438	465	175
h - Height (mm)		70	84	90	106	130	158	258	330	-
Weight (kg)		12	13	15.5	19	35	47	75	95	5

CWFAT

DRY DIAL

- MAX 60°C - 16 BAR
- Woltman cold water pulse emitting water meter
- Internal and external PTFE coating
- 2,5 m cable



CWFAT 50	Flange 2"
CWFAT 65	Flange 2 1/2"
CWFAT 80	Flange 3"
CWFAT 100	Flange 4"

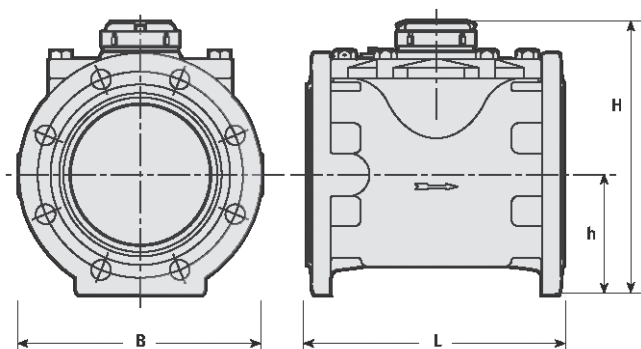

FEATURES

WSTsb	Maximum Flowrate (m³/h)	Nominal Flowrate (m³/h)	Transitional Flowrate (m³/h)	Minimum Flowrate (m³/h)	Flow (m³/h)	register capacity (m³)	Value	readable unit (liter)
Nominal size (mm) (inch)								
50 2	78.75	63	1.01	0.63	0.15	10 ⁶	100	0.5
65 2 1/2	78.75	63	1.01	0.63	0.15	10 ⁶	100	0.5
80 3	125	100	1.6	1	0.25	10 ⁶	100	0.5
100 4	200	160	2.56	1.6	0.3	10 ⁷ /10 ⁶	100	5
150 6	312.5	250	4	2.5	0.8	10 ⁷ /10 ⁶	100	5
200 8	787.5	630	20.16	12.6	2	10 ⁸	50	50
250 10	1250	1000	32	20	3	10 ⁸	50	50
300 12	1250	1000	32	20	4	10 ⁸	50	50

Accuracy ±5%

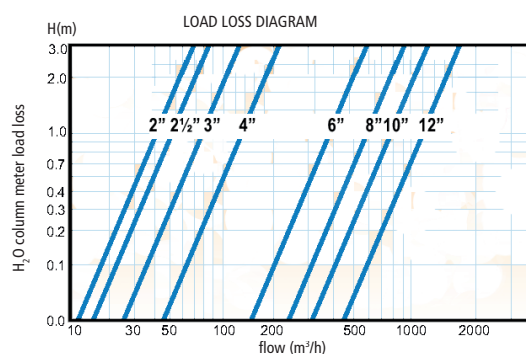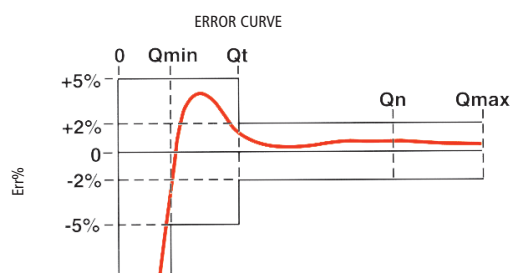

A.T.A. S.R.L.
 VIA MOLINELLO 38 - 16035 RAPALLO (GE)
 TEL. 0185 263015 - FAX 0185 260114
 WWW.ATASRL.IT ATASRL@ATASRL.IT